

一、矿卡机型-分布



SKT90S宽体车



SKT105S宽体车



SRT95S矿车



SET150S矿车



SET240S矿车




SAT40C铰接车

二、油缸参数表

序号	机型	描述	行程	安装距
1	55T矿车	举升油缸	850/815	1365
2		转向油缸	470	826
3		后悬缸	185.4	1062.4
4		前悬缸	300	1164.2
5		前悬缸	140	620
6	SKT90宽体车	前悬缸	200	680
7		转向油缸	400	735
8		低温前悬缸	130	650
9		低温转向油缸	400	735
10	SRT95S矿车	举升油缸	1020/1000	1610
11		前悬缸	320	1210
12		转向油缸	480	1135
13		后悬挂缸	152.25	1150.25
14	SKT100宽体车	转向油缸	365	735
15		前悬缸	200	680
17		后悬缸	115	820
18		蓄能器油缸	123/188	801
17		举升油缸	845/850/838	1399
18		低温转向油缸	365	735
19		低温前悬缸	200	680
20		低温后悬缸	115	820
21		低温蓄能器油缸	123/188	821
22		低温举升油缸	845/850/838	1399
53	SKT130s宽体车	低温后悬挂油缸	115	960
54		低温转向油缸	395	826
55		低温前悬缸	280	945
56	SKT160S宽体车	低温转向油缸	414	1036
57		低温举升油缸	1131/1136/1140	1748
58		低温前悬挂油缸	320	948
59		低温后悬挂油缸	120	920
60	SAT45S铰接车	举升油缸	2435	3035
61		前悬缸	220	780
62		后悬缸	220	940
63		转向油缸	560	950
64		蓄能器油缸	123/188	801

23	SAT40C铰接车油缸	转向油缸	560	950
24		前悬缸	180	680
25		后悬缸	155	797
26		举升油缸	2345	2945
27		蓄能器油缸	123/188	801
28		低温转向油缸	560	950
29		低温前悬缸	180	680
30		低温后悬缸	155	797
31		低温举升油缸	2345	2945
32		低温蓄能器油缸	123/188	821
33	SKT125s宽体车	转向油缸	415	785
34		举升油缸	973/786/981	1535
35		前悬油缸	140	800
36		后悬油缸	140	800
37	SET150S矿车	举升油缸	953/928/821	1846
38		前悬缸	250	1725
39		后悬缸	158	1072
40		转向油缸	606	1071
41		低温转向油缸	606	1071
42		低温前悬缸	250	1725
43		低温举升油缸	953/928/821	1846
44		低温后悬缸	158	1072
45		转向油缸	685	1250
46		举升油缸	1405/1370	2060
47	SET240S矿车	前悬缸	235	2015
48		后悬缸	270	1240
49		低温转向油缸	685	1250
50		低温举升油缸	1370/1405	2060
51		低温前悬缸	235	2015
52		低温后悬缸	270	1240
65	SET320S矿车	转向油缸	800	1710
66		举升油缸	2770	1902
67		后悬挂油缸	200	1340
68		前悬挂油缸	310	2230
69	三江-360T矿车	举升油缸	1041/1078/634	2320
70		转向油缸	762	1621
71		前悬挂油缸	1080	2963
72		后悬挂油缸	225	1360
73		低温转向油缸	550	1230
74		低温后悬挂油缸	300	970

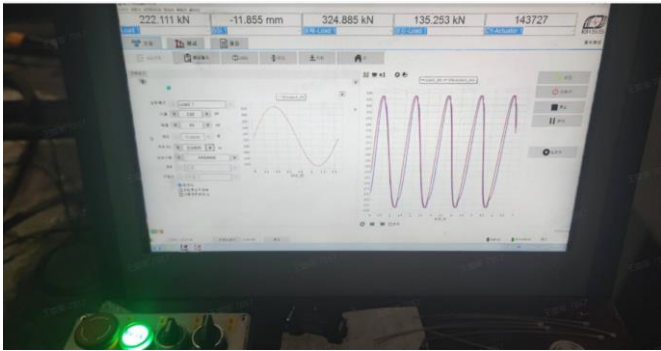

2、步入式环境模拟箱，温度范围：-45℃至+105℃

3、常规的试验能力，如重载偏载试验、2P冲击/2F拉力试验、耐久试验等。